



260

East Hampton



Vitreous China Pedestal Lavatory



Features

- Versatile Pedestal Lavatory Complements any Décor
- 21" x 18-1/4" Pedestal Lavatory
- Available with Single Hole, 4" or 8" Faucet Centers
- Comfortable 33" Height
- Concealed Front Overflow
- One-Piece Hanger Included
- Available in White, Standard, Premium and Designer Colors (Consult Price Book for Specific Colors)
- Outstanding Protection - The Mansfield® Limited Lifetime Warranty

Model 260-8
Shown in White
(Faucet and drain
assembly not included)

Model Numbers

Order No.	Description	Approx. Wt.
260	21" x 18-1/4" Ledge back lavatory with pedestal. Available with single hole, 4" and 8" faucet centers. Complete with hanger and installation instructions. Less faucet and drain assembly. Specify color.	48 lbs. (22 kg)
2018C-1	21" x 18-1/4" Ledge back lavatory with single hole. Specify color.	35 lbs. (16 kg)
2018C-4	Same as above with 4" faucet centers. Specify color.	35 lbs. (16 kg)
2018C-8	Same as above with 8" faucet centers. Specify color.	35 lbs. (16 kg)
293	Pedestal only. Specify color.	13 lbs. (6 kg)



East Hampton

Vitreous China
Pedestal Lavatory


R o u g h - i n D i m e n s i o n s

Specifications

Material	Vitreous China
Size	21" x 18-1/4" (533 mm x 463 mm)
Basin	17" x 12-5/8" (432 mm x 321 mm)
Faucet Holes	Single Hole - 1-7/16" 4" Faucet Centers - 1-3/16" (All Holes) 8" Faucet Centers - 1-7/16" (All Holes)
Shipping Dimensions	Model 2018C 22-1/4" x 9-1/2" x 19-1/4" (565 mm x 241 mm x 489 mm) Model 293 32" x 7-3/8" x 7-3/8" (813 mm x 187 mm x 187 mm)
Shipping Weight	Model 2018C - 37.8 lbs. (17 kg) Model 293 - 15.2 lbs. (7 kg)
Warranty	Limited Lifetime

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet or exceed ANSI/ASME A112.19.4M and CSA B45.3 standards, and other state and local codes.

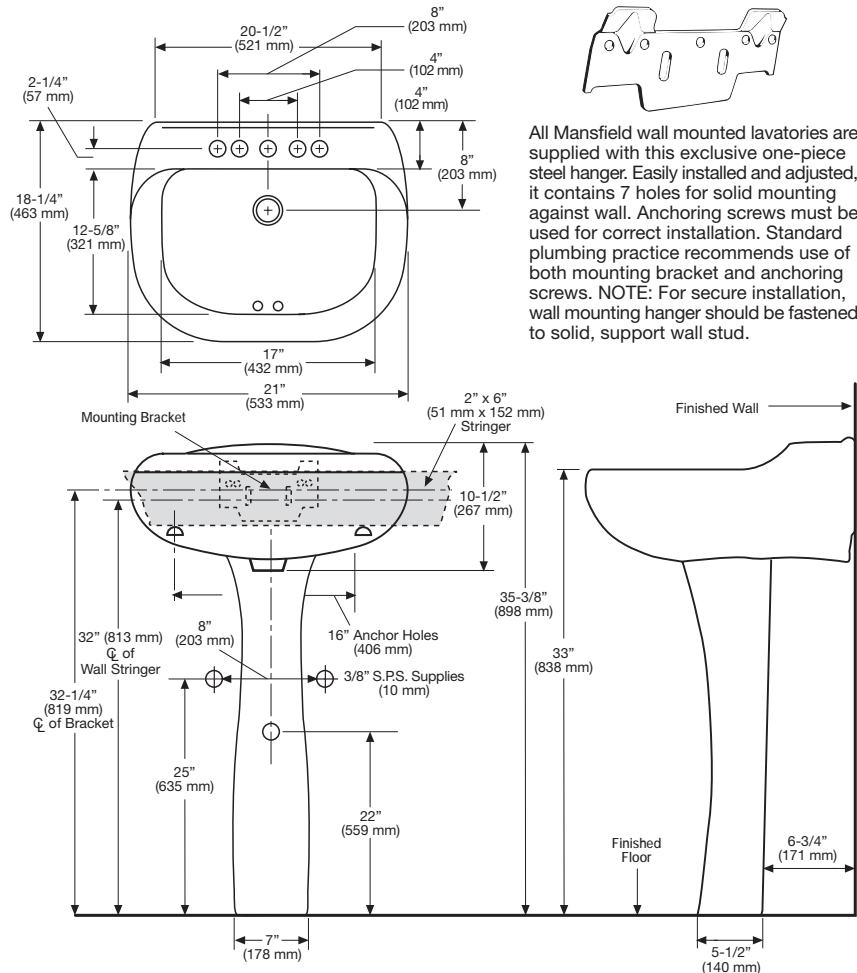

All Mansfield wall mounted lavatories are supplied with this exclusive one-piece steel hanger. Easily installed and adjusted, it contains 7 holes for solid mounting against wall. Anchoring screws must be used for correct installation. Standard plumbing practice recommends use of both mounting bracket and anchoring screws. NOTE: For secure installation, wall mounting hanger should be fastened to solid, support wall stud.

NOTE: Rough-in measurements may vary 1/4" (6.4 mm ±).

NOTE: For installation of waste outlet through-the-floor, an S-trap is required.

See our complete line of acrylic, vitreous china, cast iron and enameled steel bathroom and kitchen fixtures, plastic tank trim and plumbing products.

Mansfield
Performance For A Lifetime™

Mansfield® Plumbing Products LLC • Sales Services Toll Free 877-850-3060 • Fax 419-938-6234
Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com