

## COMPARE THESE FEATURES

- Cast Iron pump housing for long life.
- Engineered Thermo Plastic Impeller designed for durability.
- 115V, 1/2 HP motor.
- Use for removing water from water heaters, power washing, water transfer and adding propylene glycol anti-freeze to radiant heating lines.
- Permanently lubricated ball bearings.
- Carbon ceramic shaft seal.
- 9 ft. power cord.
- Includes 3/4" NPT garden hose adapters, suction screen and extra set of brushes.
- Maximum temperature for dewatering-120°F (49°C).
- One-year limited warranty.

**NEW!**


**Model 314**

# The "High Capacity" Water Mover

**PORTABLE NON-SUBMERSIBLE UTILITY PUMP  
FOR  
DEWATERING**



**"High Capacity" Water Mover  
Pump Performance Curve**

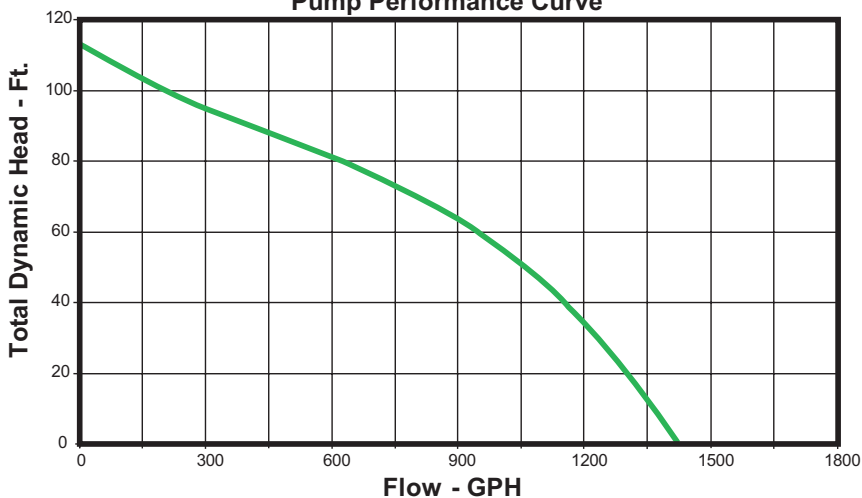

IL0153

© Copyright 2003 Zoeller Co. All rights reserved.