



475

Suburban®



ULF, integral trap, siphon jet, vitreous china urinal



Shown in White

Features

- Complies with ADA Requirements for Accessibility
- 14" Depth
- Integral Trap Urinal
- Flushes using 1.0 gpf - 3.8 Lpf, ULF
- When Installed with Mansfield #1075 Torpedo™ Flushometer Valve, the 475's ULF .75 gpf - 2.85 Lpf Capability Exceeds all ULF Code Requirements
- Complete with 3/4" Top Spud
- Limited, Lifetime China Warranty
- Available in White and Standard Color - Bone
- Meets ANSI/ASME A112.19.6-1995 and A112.19.2M-1998
- Meets Canadian Standards Association General Requirements for Ceramic Plumbing Fixtures B45.1-99

Specifications

Order No.	Description	Approx. Wt.
475	Vitreous china integral trap siphon jet ULF urinal. Suitable for a range of flush volumes. Complete with 3/4" top spud, 2" IPS outlet connector and gasket. Concealed mounting bracket, bolts and washers included. Flush valve not included. Specify color.	31 lbs.



No. 475 meets ANSI/ASME A112.19.6-1995 and A112.19.2M-1998.



Suburban®

ULF, integral trap, siphon jet,
vitreous china urinal

R o u g h - i n D i m e n s i o n s

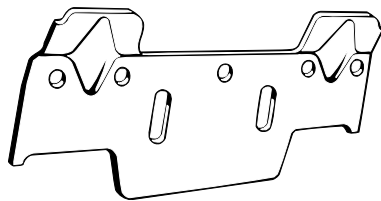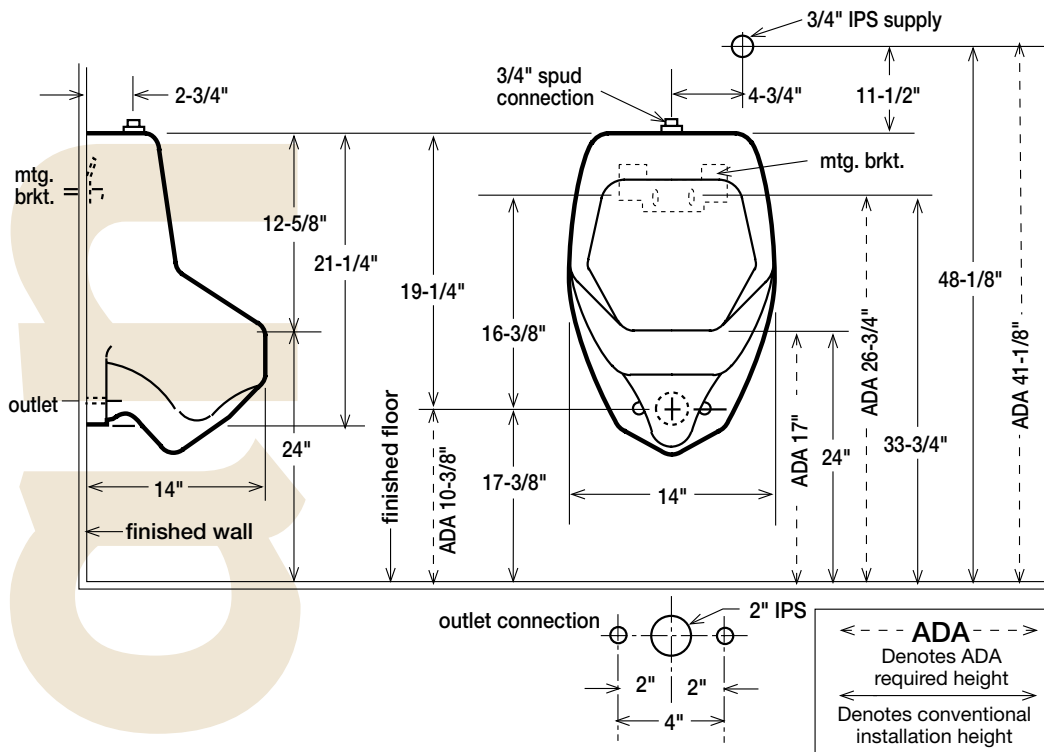

All Mansfield wall-mounted urinals are supplied with this exclusive one-piece steel hanger. Easily installed and adjusted, it contains 7 holes for solid mounting against wall. Anchoring screws must be used for correct installation. Standard plumbing practice recommends use of both mounting bracket and anchoring screws. NOTE: For secure installation, wall mounting hanger should be fastened to solid, support wall stud.

NOTE: Rough-in measurements may vary 1/4" (±).

See our complete line of acrylic, china and porcelain-on-steel bathroom fixtures, plastic tank trim and plumbing products.



Mansfield Plumbing Products LLC • Sales Services Toll Free 877-850-3060 • Fax 419 938-6234
Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com